



# TA72

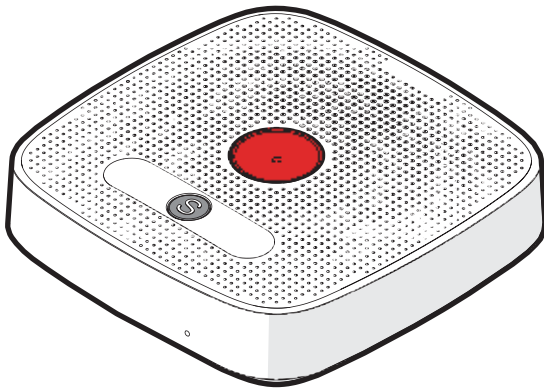

- **Quick and easy programming via intuitive cloud programming**
- **Various communication protocols**
- **First-class audio quality**
- **Vocal guidance**
- **Design is centred on triggering alarms and generating communication**
- **Best of modern communication options with Ethernet/VoIP and PSTN**
- **Always up to date via software remote updates**
- **Easy care - easy to clean and waterproof in accordance with IP32**
- **100 % high-quality ABS material in premium white**

The TA72 offers multiple innovations that help you manage your telecare service easily, efficiently and economically. It can communicate through LAN/Ethernet, in addition to analogue landline telephony. Two "plug and play" programming methods are now available, one through the TeleAlarm® Cloud Services platform and the other through the Configuration Manager software.

## System overview

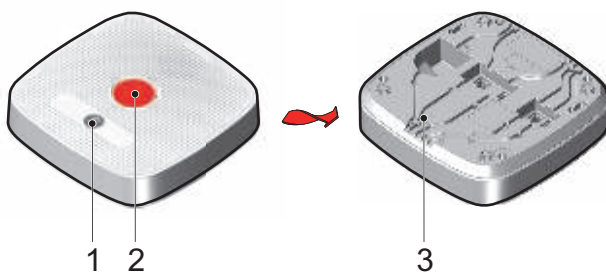

1. Action button
2. Emergency call button
3. Maintenance button

## Functions

### Multi-purpose buttons

In the case of an emergency, the TA72 sends an alarm via the telephone network, or via LAN/Ethernet connection, either to an alarm receiving centre or a private phone.

The emergency call is triggered by pressing the emergency call button on the TA72, or on the button of the wireless transmitter that is delivered with the device. Up to 10 wireless transmitters can be paired to the TA72. The action button is a multi-purpose trigger: It can be pressed to cancel an unintentionally triggered alarm during the pre-alarm time, but it can also be configured to be used as a service button. When the TA72 has an error (message), pressing the action button repeats the status announcement.

### Multiple protocols

The TA72 is capable of multiple protocols and therefore compatible with most telecare monitoring solutions. The TA72 can also be used with IP connections and multiple legacy phone protocols.

### Multiple programming possibilities

The TA72 can be programmed via the TeleAlarm® Cloud Services platform (over LAN/Ethernet or analogue telephony) or by Configuration Manager software on a local computer. This cloud or local programming is a "plug and play" process, sparing installers time and effort.

The TA72 can also be programmed by compatible alarm receiving centres.

### Interactivity with wireless transmitters

Several wireless transmitters can be used along with the TA72, for example the Tx transmitter.

## Certifications and approvals

LVD 2014-35/EU, EMC 2014-30/EU, RED 2014/53/EU, RoHS 2011/65/EU.

EN 50134-1, EN 50134-2, EN 50134-3, EN 50134-5

EN 301489-1 V2.1.1

EN 301489-3 V1.6.1

EN 62368-1

EN 62479

EN 50130-4

EN 55032

EN 300220-2 V3.1.1 Category 1 radio receiver

Conducted sensitivity typ. -115 dBm

Field sensitivity < 36 dBµV/m

## Approval by healthcare providers

**TA72 Pos. No. Pflegehilfsmittelverzeichnis (register of care aids):**

52.40.01.1092

## Scope of delivery

Quantity	Component
1	Pre-installed rechargeable battery
1	Wireless transmitter including CR2430 battery and necklace or bracelet
1	Power adapter
1	Optional telephone cable and/or network connection cable
1	Optional manual for technicians/installers
1	Quick Guide for users

## TA72 technical specifications

Dimensions (H x W x D)	50 x 191 x 191 mm
Weight	Approx. 0.6 kg
Permissible temperature range (environment / storage)	+5 °C to +40 °C -20 °C to +60 °C
Maximum relative humidity	93 %
Altitude	Up to 5000 m
Switched-mode power supply	Adapter 100 – 240 V AC / 0.18 A (input), 5.9 V DC / 1 A (output)
Unit battery	3.6 V NiMH battery, 2 Ah

Battery operating time	Min. 48 h with one 30-minute call. Value on date of purchase with a fully charged battery.
Current consumption in standby mode	Approx. 135 mA with power supply. Approx. 30 mA on battery.
Communication connections	Ethernet/VoIP, PSTN
Receiver	Complies with category 1 as specified by EN 300220-1 V3.1.1
Frequency	869.2125 MHz (EU carephone frequency)
Environmental class	Class 1 as specified by EN 50134-3
Degree of protection	IP32 (IP30 wall mounting)
Max. number of wireless transmitters and detectors	10
Programmable call numbers	10 call destinations freely assignable to any type of trigger group
Voice message	Recordable, max. 10 seconds
Volume settings	8 levels
Emergency call protocols	Multi-protocol (SCAIP, RBIP, SIP, telephone, RB2000, RB2000E, TTnew+, CPC, BS8521)
Programming options	<ul style="list-style-type: none"> <li>Remote programming via TeleAlarm® Cloud Services</li> <li>Configuration Manager</li> <li>Remote programming from alarm receiving centre</li> <li>Service mode</li> </ul>
Hands-free range	Min. 15 m to TA72 (voice possibility when telephone is on-hook)
Self-test function/test call	<ul style="list-style-type: none"> <li>PSTN: Freely selectable from 1 to 28 days.</li> <li>LAN connection: Freely selectable from 1 to 999 hours</li> </ul>
Available languages	Dutch, English, French, German, Spanish, and tone only
User guidance	Synthetic speech and LED indication
User assistant	"Synthetic speech disabled" mode
Connectivity	<ul style="list-style-type: none"> <li>LAN/Ethernet connection (10/100 Mbps)</li> <li>Phone line (PSTN)</li> <li>External telephone</li> </ul>

## Technical specifications of wireless transmitter

Dimensions (H x D)	11 x 41 mm
Weight	15 g
Permissible temperature range	Operation: -10 °C to +55 °C Storage: -20 °C to +80 °C
Electrical power supply	Replaceable lithium battery CR2430
Current consumption	Transmitting power: max. 22 mA Quiescent mode: max. 3 µA
Battery lifetime	Approx. 5 years if one emergency call is triggered per day. Automatic radio link and battery monitoring every 21 hours
Frequency	869.2125 MHz (EU carephone frequency)
Stability (0 °C to +55 °C)	< 2.5 kHz
Modulation	FSK
Antenna	Integrated loop
Radiated intensity	Approx. 320 µW
Degree of protection	IP67 in accordance with IEC 60529
Environmental class	II
Maximum range	<ul style="list-style-type: none"> <li>• Inside buildings: 30 – 50 m (depending on the building structure)</li> <li>• In the open air: max. 300 m</li> </ul>

TeleAlarm SA  
Rue du Pont 23  
2300 La Chaux-de-Fonds  
Switzerland  
www.telealarm.com

© Copyright TeleAlarm SA, 2020

TeleAlarm Europe GmbH  
Hertzstraße 2  
04329 Leipzig  
Germany

Contact in UK:  
Tel.: +44 (0) 333 0124392  
info-uk@telealarm.com