




Local bus dome light (G-Y-R) with IO contacts



- Width: 3.14 in. (8.0 cm), Height 3.14 in. (8.0 cm), Depth 1.37 in. (3.5 cm) (incl. prisms)
- The light is connected to local bus, 4 wires, on an IP-unit, remote programming is possible.
- Connectable to iCall IP-unit (1xx), 220 IP-OiD, 220 SIP-Touch and 290 SIP-Touch via local bus.
- Extended durability due to long life of LED.
- Very powerful rays of light (because of prism shape, light is readily visible at any angle)
- Possibility to connect IO-contacts.

- Call (red)
- Assistance (flashing red + green)
- Bathroom assistance (flashing yellow + green)
- Bathroom call (yellow)
- Presence (green)
- Emergency (rapidly flashing red)

- IO-contacts**
1. 24V
 2. Call
 3. Present
 4. Toilet
 5. LED call/bathroom
 6. LED present

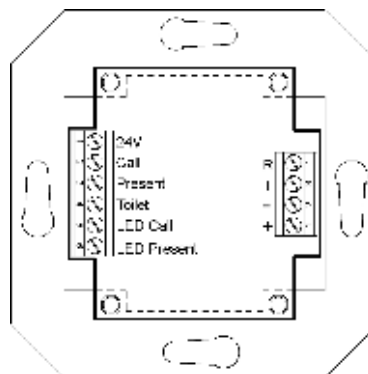

- Local bus connections**
1. +24v
 2. GND
 3. TX
 4. RX

Electrical specifications

Power supply: min: 16V - max: 30V

Power consumption (24v): standby: 13mA - max: 40 mA

The LED's are connected in series. Thus power consumption does NOT depend on the number of lights that are active. Power consumption does also NOT depend on the power supply voltage.

Order information

Part N° NWBAES3850