


Configuration Manager

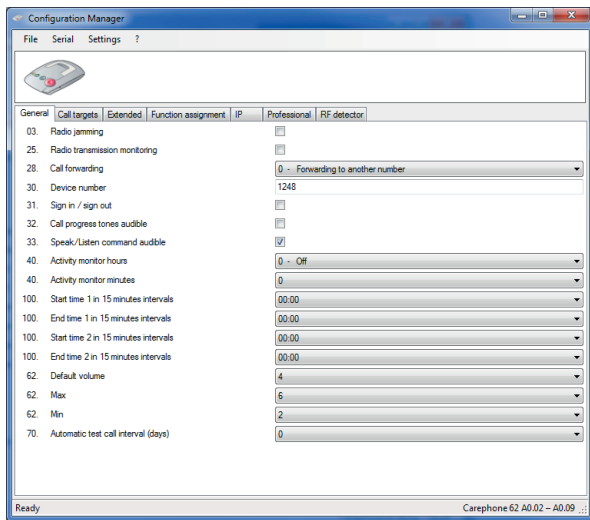

- Quick and easy configuration of Carephones 6X
- Reads and writes settings via serial connection, hard disk drive or microSD card
- Easy to manage configurations related to the offered service
- Convenient firmware update via serial connection

The Configuration Manager is a standalone software for:

- reading/writing the device parameters of Carephones 6X and supported modules via serial connection, micro SD card or hard disk drive
- updating the firmware of Carephones 6X via serial connection.

Functions

The following information can be edited:

- Call targets, protocols and media type
- General configuration, such as radio transmission monitoring, activity monitor parameters, etc.
- Extended configuration, such as waiting time for repeated emergency calls, activation of service button, etc.
- Function assignment, which allows assigning a call number to each individual call trigger.
- IP/GSM module configuration, related to IP and GSM features.
- RF detector programming data, allowing assigning a call trigger to the wireless detectors.

The settings can be saved into a csv file, facilitating the upload of these settings in other applications. The settings can also be printed.

Technical specifications

Formats supported	reads & writes microSD cards settings files for Carephone 62 and Carephone 61
Storage type	free definable name on the computer
OS	Windows XP, 7 & 8
Languages	English, German, French, Dutch
microSD card	32 GB maximum capacity, Sandisk or Kingston
Serial connection programming supported from	<ul style="list-style-type: none"> • Carephone 61 A2.02 • Carephone 62 A0.07
Recommended connectors	<ul style="list-style-type: none"> • Bosch serial programming cable APD 9 poles (commercial type number CRS-CP-SPC-APD9P, SAP number F.01U.140.074) • Brainboxes US-101 USB to serial adapter

TeleAlarm SA
 Rue du Pont 23
 2300 La Chaux-de-Fonds
 Switzerland
 info@telealarm.com
www.telealarm.com

TeleAlarm Europe GmbH
 Hertzstraße 2
 04329 Leipzig
 Germany
 info-uk@telealarm.com
www.telealarm.com